


Flowmon Probe Specification

MODELS LIST

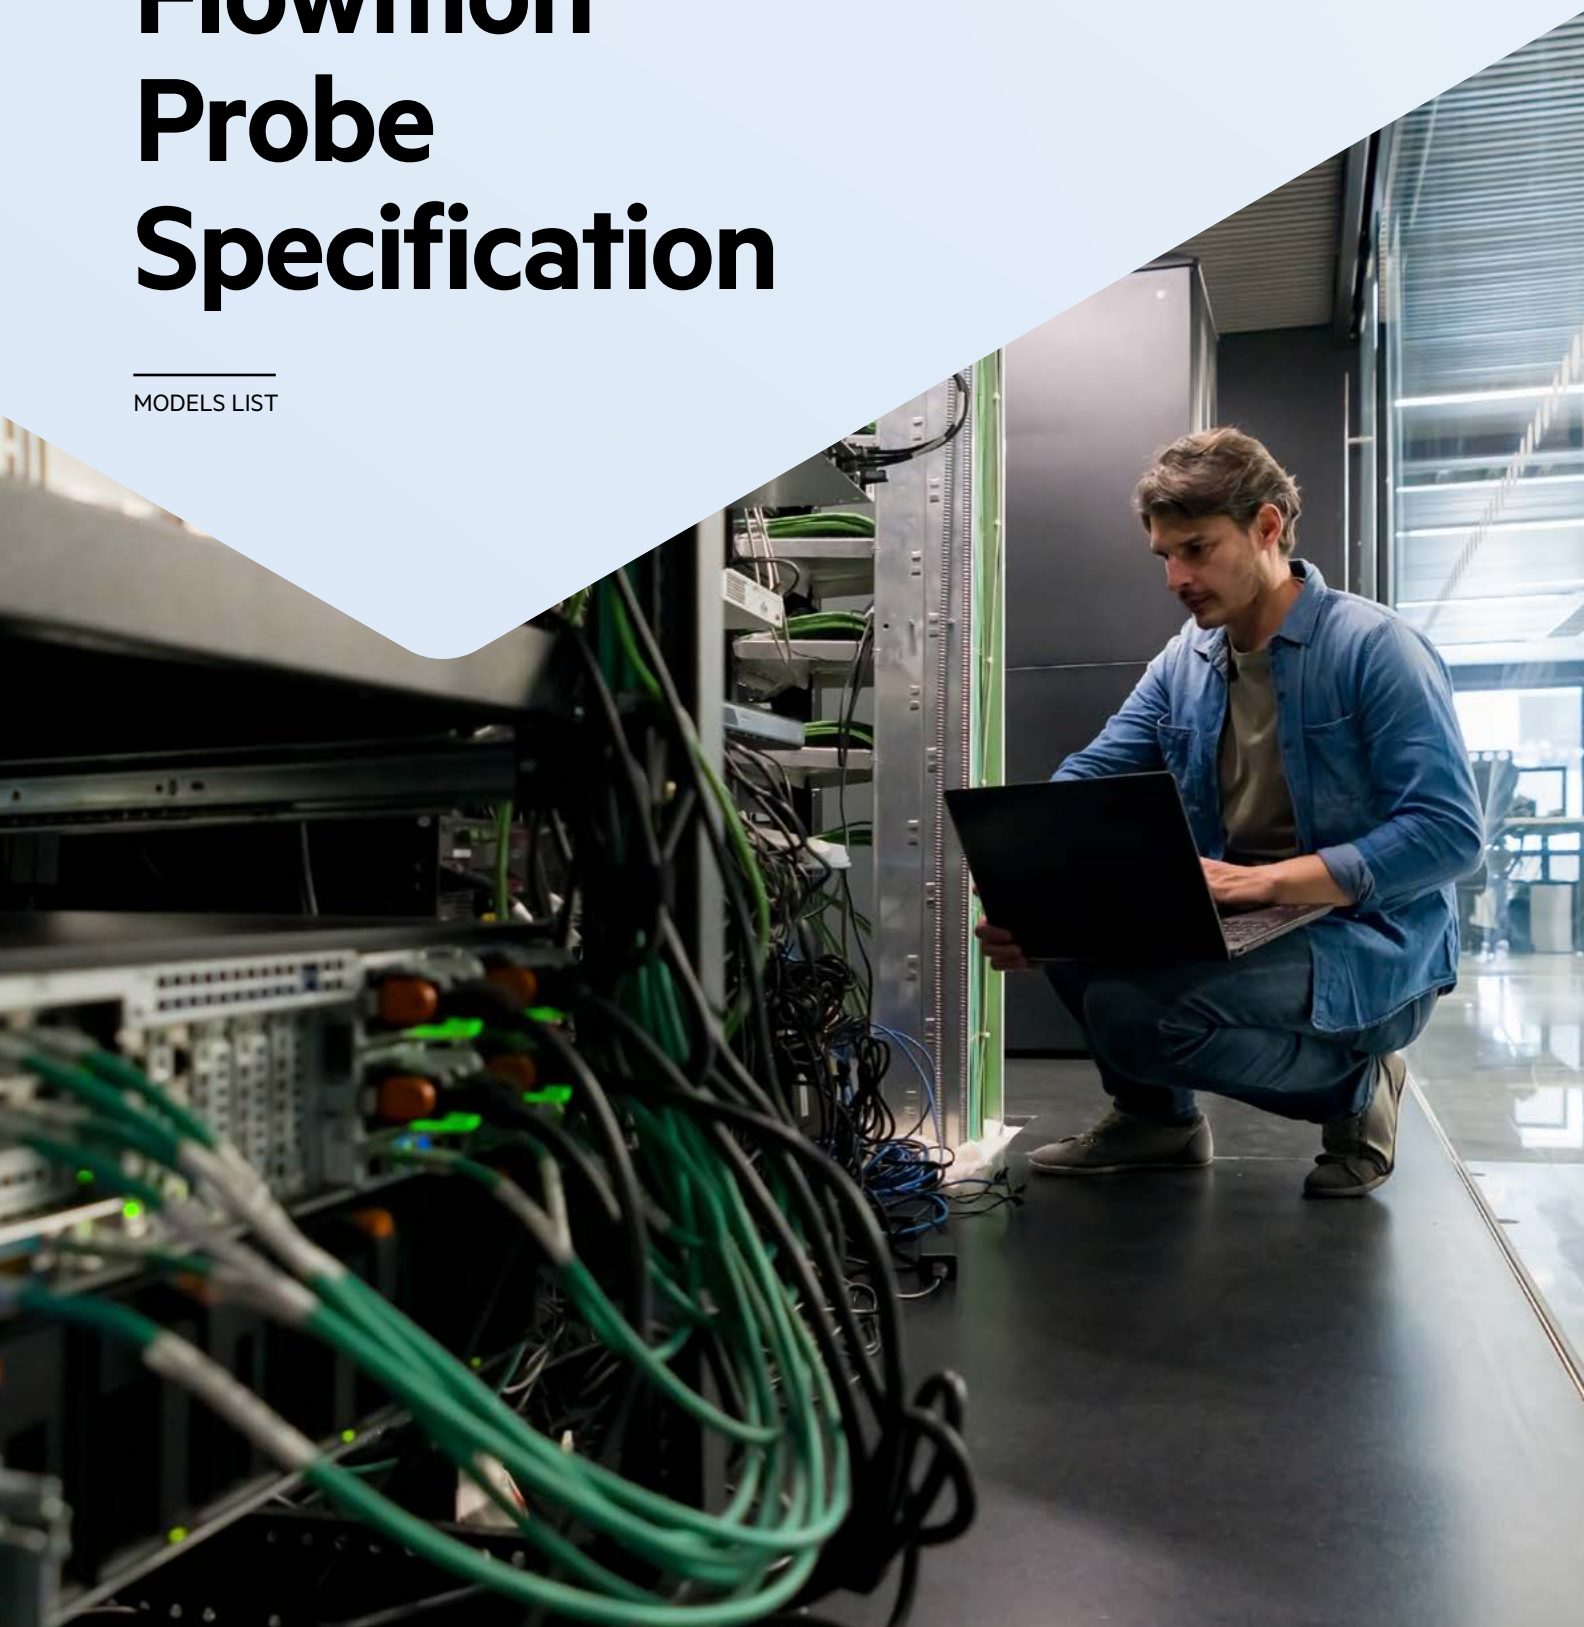

Valid from November 17, 2025

Flowmon Probe

Flowmon Probe is a high-performance appliance that monitors network traffic and generate IP flow statistics. The flow statistics are then exported to storage for further analysis by a Flowmon Collector or other NetFlow/IPFIX compatible application. The Probe provides NetFlow/IPFIX data necessary for network operations, troubleshooting, performance, and security monitoring.

Flowmon Probe is available in the form of a hardware appliance of 1U rack unit size and as a virtual appliance for deployment into VMware, Hyper-V, and KVM virtual environments.



Flowmon IPFIX Extensions

Flowmon Probe, a hardware-based or virtual appliance, supports **Flowmon IPFIX Extensions** which extend IPFIX information elements with monitoring of network performance statistics (Round-Trip Time, Server Response Time, delays, jitter, etc.) and application protocols such as HTTP, DNS, DHCP, SMB, E-mail, MSSQL, MySQL, PostgreSQL, VoIP SIP statistics, SSL/TLS, CoAP, IEC104 and others. For more information about Flowmon IPFIX Extensions, see the Flow Standards Specification document available at <https://docs.progress.com/category/flowmon-os>.

Supported L2 and Tunneling Protocols

Besides MAC addresses monitoring, Flowmon Probe also supports various L2 protocols and encapsulations such as VLAN, QinQ, MPLS, GRE, ESP, TRILL, and VxLAN. The monitoring interfaces of FM-PRB-HW-STD-1000-CU, FM-PRB-HW-STD-2000-CU, FM-PRB-HW-STD-4000-CU, FM-PRB-HW-STD-10000-SFP+, FM-PRB-HW-STD-20000-SFP+ and FM-PRB-HW-PRO-4000-CU can be used as targets for ERSPAN/GRE or VxLAN monitoring sessions.

Additional Modules for Probes

Flowmon Probes can be extended with additional modules (licensed separately) such as APM Probe, FPI Probe and IDS Probe. For details, please refer to corresponding specifications. Flowmon

Probe needs to be covered by valid technical support in order to run additional module otherwise only standard Probe functionality is available and additional modules cannot be activated.

Hardware Appliance

Flowmon Probe in the form of a hardware appliance is a high-performance stand-alone device for monitoring all types of networks from 10 Mbps to 100 Gbps. Flowmon Probe comes in a **standard** or **Pro model** with a different number and type of monitoring ports. A hardware-based Flowmon Probe provides a **built-in flow collector** and Flowmon Monitoring Center (FMC) – application for flow collection, visualization, reporting, and analysis. The built-in collector is restricted to receive flow data only from the Probe itself. It is necessary to use a stand-alone Flowmon Collector for collecting data from other/multiple sources.

Flowmon Probe is equipped with two copper 10/100/1000 Mbps Ethernet **management ports** (except for FM-PRB-HW-STD-1000-CU with only one management port) which can be used for appliance configuration, management, and flow data export. On the FM-PRB-HW-PRO-200000-QSFP28 model, management ports can be upgraded to 10 Gbps Ethernet by purchasing an upgrade package. The upgrade package can be purchased only for new appliances (at the moment of purchase).

Flowmon Probe is also equipped with a **remote control** feature for remote monitoring of device conditions. It offers command-line access, a web GUI and a virtual console. All hardware-based models provide a dedicated network interface for remote control. For details, see the Remote Console Setup document available at <https://docs.progress.com/category/flowmon-os>.

Virtual Appliance

Flowmon Probe in the form of a virtual appliance (VA) is a network monitoring appliance designed for deployment into a virtual environment (VMware, Hyper-V, KVM). Flowmon Probe VA provides functionality similar to the hardware-based Flowmon Probe appliance. Flowmon Probe VA models differ in the number and speed of supported monitoring ports. In contrast with the hardware-based appliance, a Flowmon Probe VA **does not include a built-in collector**, hence it is necessary to use a dedicated collector for NetFlow/IPFIX data storage and analysis.

Flowmon Probe VA supports up to two **management ports** (except for FM-PRB-VA-1000 with only one supported management port) which can be used for appliance configuration, management, and flow data export.

Hardware Appliances

P/N ¹	Model	Performance Per Port ²	Performance Per Appliance ²	Monitoring Port	Flow Cache ³	RAID	Disk Type	CPU ⁴	RAM
FM-PRB-HW-STD-1000-CU	Flowmon Probe 1000	148 Mpps	148 Mpps	1 x 10/100/1000 Mbps Ethernet	0.5 M	-	1 x SATA	8	32 GB
FM-PRB-HW-STD-2000-CU	Flowmon Probe 2000	148 Mpps	296 Mpps	2 x 10/100/1000 Mbps Ethernet	0.5 M	-	1 x SATA	8	32 GB
FM-PRB-HW-STD-4000-CU	Flowmon Probe 4000	148 Mpps	3 Mpps	4 x 10/100/1000 Mbps Ethernet	0.5 M	-	1 x SATA	8	32 GB
FM-PRB-HW-STD-10000-SFP+	Flowmon Probe 10000 SFP+	5 Mpps	5 Mpps	1 x 1/10/25 Gbps Ethernet	4 M	-	1 x SATA	12	64 GB
FM-PRB-HW-STD-20000-SFP+	Flowmon Probe 20000 SFP+	5 Mpps	8 Mpps	2 x 1/10/25 Gbps Ethernet	4 M	-	1 x SATA	12	64 GB
FM-PRB-HW-STD-40000-SFP+	Flowmon Probe 40000 SFP+	15 Mpps	60 Mpps	4 x 1/10/25 Gbps Ethernet	4 M	RAID1	2 x SATA	48	64 GB
FM-PRB-HW-PRO-4000-CU	Flowmon Probe 4000 Pro	148 Mpps	3 Mpps	4 x 10/100/1000 Mbps Ethernet	0.5 M	RAID1	2 x SATA	8	32 GB
FM-PRB-HW-PRO-20000-SFP+	Flowmon Probe 20000 Pro SFP+	37 Mpps	74 Mpps	2 x 1/10/25 Gbps Ethernet	4 M	RAID1	2 x SATA	48	128 GB
FM-PRB-HW-PRO-40000-SFP+	Flowmon Probe 40000 Pro SFP+	37 Mpps	148 Mpps	4 x 1/10/25 Gbps Ethernet	4 M	RAID1	2 x SATA	48	128 GB
FM-PRB-HW-PRO-200000-QSFP28	Flowmon Probe 200000 Pro QSFP28	120 Mpps ⁵	240 Mpps ⁵	2 x 40/100 Gbps Ethernet	32 M	RAID1	2 x SATA	40 ⁶	256 GB

¹ CU indicates a copper-based monitoring interface. SFP, SFP+ and QSFP28 interfaces require the use of a transceiver module chosen from Flowmon Accessories Price List according to the characteristics of the monitored network. Flowmon Probes supporting 10/25Gbps Ethernet monitoring can be used with 10Gbase SFP+ or 25Gbase SFP28 transceivers.

² Performance is measured in our test environment using the smallest supported packet size (64 bytes) and the highest available port speed for each model. Flowmon Probe is configured without any optional L2/L3/L4/L7 protocol analysis, tunnel decapsulation or additionally installed packages. All RX/TX traffic of the monitored network is sent to a single monitoring port of the appliance. There are several other factors that may affect your specific performance, such as traffic type, average packet size, distribution of packet arrival times, number and type of L2/L3/L4/L7 protocols being analyzed or additionally installed packages. In deployments that split RX/TX traffic of the monitored network to different monitoring ports of the appliance, e.g. by using an optical TAP, NPM metrics will not be computed correctly, the quality of L2/L3/L4/L7 protocol analysis may be negatively impacted and the overall performance may not be optimal. While we do our best to represent the data as fairly and accurately as possible, your environment may experience different limits.

³ The number of flow entries in flow cache per monitoring port.

⁴ The number of CPU cores, with Hyper-Threading enabled.

⁵ Performance is measured for IP traffic or IP traffic encapsulated in MPLS (up to 2 layers), VLAN or QinQ, without any optional L2/L3/L4/L7 protocol analysis or additionally installed packages. If other encapsulation protocols or appliance configuration options are used, performance may vary based on the encapsulation protocol and network traffic distribution and mixture. For example, the observed performance of an appliance monitoring a network with up to 100,000 flows per second whilst performing DNS, HTTP, NBAR2, TLS and NPM metrics analysis is approx. 6 Mpps per port.

⁶ Model FM-PRB-HW-PRO-200000-QSFP28 has Hyper-Threading disabled.

Flowmon Probe **FM-PRB-HW-PRO-200000-QSFP28** can operate in **2x 100G** or **2x 40G** modes. We recommend to use transceivers from Flowmon Accessories Price List:

- 2x 100G mode: 2x 100G-QSFP28-SR4 or 2x 100G-QSFP28-LR4 transceivers.
- 2x 40G mode: 2x 40G-QSFP-SR4 or 2x 40G-QSFP-LR4 transceivers.

All models of a hardware-based Flowmon Probe are equipped with a built-in collector capable of processing **50,000 fps** (flows per second) and come with **1 TB storage capacity**

Hardware Appliances – Operating conditions

P/N	Model	Dimensions (H x W x D) cm	Weight (kg)	PSU		Power Consumption		Heat Dissipation (max.)
				Power	Hot Swap	CPU Idle	CPU max	
FM-PRB-HW-STD-1000-CU	Flowmon Probe 1000	1U, 4.3 x 43.4 x 46.1	9.6	450 W	no	44 W	108 W	1730 BTU/h
FM-PRB-HW-STD-2000-CU	Flowmon Probe 2000	1U, 4.3 x 43.4 x 46.1	9.6	450 W	no	44 W	108 W	1730 BTU/h
FM-PRB-HW-STD-4000-CU	Flowmon Probe 4000	1U, 4.3 x 43.4 x 46.1	9.6	450 W	no	44 W	108 W	1730 BTU/h
FM-PRB-HW-STD-10000-SFP+	Flowmon Probe 10000 SFP+	1U, 4.3 x 43.4 x 56.3	13.2	600 W	no	62 W	122 W	2250 BTU/h
FM-PRB-HW-STD-20000-SFP+	Flowmon Probe 20000 SFP+	1U, 4.3 x 43.4 x 56.3	13.2	600 W	no	62 W	122 W	2250 BTU/h
FM-PRB-HW-STD-40000-SFP+	Flowmon Probe 40000 SFP+	1U, 4.3 x 43.4 x 71.2	19.5	2 x 1100 W	yes	154 W	423 W	3753 BTU/h
FM-PRB-HW-PRO-4000-CU	Flowmon Probe 4000 Pro	1U, 4.3 x 43.4 x 56.3	13.2	600 W	no	62 W	122 W	2250 BTU/h
FM-PRB-HW-PRO-20000-SFP+	Flowmon Probe 20000 Pro SFP+	1U, 4.3 x 43.4 x 71.2	19.5	2 x 1100 W	yes	145 W	417 W	3753 BTU/h
FM-PRB-HW-PRO-40000-SFP+	Flowmon Probe 40000 Pro SFP+	1U, 4.3 x 43.4 x 71.2	19.5	2 x 1100 W	yes	157 W	429 W	3753 BTU/h
FM-PRB-HW-PRO-200000-QSFP28	Flowmon Probe 200000 Pro QSFP28	1U, 4.3 x 43.4 x 78.7	22.5	2 x 1100 W	yes	249 W	726 W	4100 BTU/h

Continuous Operation:

- Temperature: 10°C to 35°C
- Relative Humidity¹: 10% to 80% at 29°C

Expanded Operation²:

- Temperature: 5°C to 40°C
- Relative Humidity¹: 5% to 85% at 29°C

¹ The specified temperature is the maximum dew point temperature.

² When operating in the expanded temperature range, system performance may be impacted. Device can work in this condition for up to 1% of annual operating hour

Virtual Appliances

P/N	Model	Performance Per Port ¹	Performance Per Appliance ¹	Monitoring Interfaces	Flow Cache ²	VMware ESXi	Microsoft Hyper-V	KVM	Recommended Configuration ³	Minimum Configuration ³
FM-PRB-VA-1000	Flowmon Probe 1000 VA	Up to 0.3 Mpps	Up to 0.3 Mpps	1 x 1 Gbps Ethernet	0.5 M	5.5 and later	2012 R2 and higher	KVM 3.10.0 and higher	6 CPU cores, 16 GB RAM, 25 GB HDD	4 CPU cores, 8 GB RAM, 25 GB HDD
FM-PRB-VA-2000	Flowmon Probe 2000 VA	Up to 0.3 Mpps	Up to 0.6 Mpps	2 x 1 Gbps Ethernet	0.5 M			KVM 3.10.0 and higher	6 CPU cores, 16 GB RAM, 25 GB HDD	4 CPU cores, 8 GB RAM, 25 GB HDD
FM-PRB-VA-4000	Flowmon Probe 4000 VA	Up to 0.3 Mpps	Up to 1.2 Mpps	4 x 1 Gbps Ethernet	0.5 M			QEMU 1.5.3 and higher	8 CPU cores, 16 GB RAM, 25 GB HDD	6 CPU cores, 8 GB RAM, 25 GB HDD
FM-PRB-VA-6000	Flowmon Probe 6000 VA	Up to 0.3 Mpps	Up to 1.8 Mpps	6 x 1 Gbps Ethernet	0.5 M			QEMU 1.5.3 and higher	12 CPU cores, 16 GB RAM, 25 GB HDD	6 CPU cores, 8 GB RAM, 25 GB HDD
FM-PRB-VA-10000	Flowmon Probe 10000 VA	Up to 0.7 Mpps	Up to 0.7 Mpps	1 x 10 Gbps Ethernet	4 M			libvirt 4.5.0 and higher	6 CPU cores, 32 GB RAM, 25 GB HDD	4 CPU cores, 8 GB RAM, 25 GB HDD
FM-PRB-VA-20000	Flowmon Probe 20000 VA	Up to 0.7 Mpps	Up to 1.4 Mpps	2 x 10 Gbps Ethernet	4 M			libvirt 4.5.0 and higher	8 CPU cores, 32 GB RAM, 25 GB HDD	4 CPU cores, 8 GB RAM, 25 GB HDD

¹ Performance is measured in our test environment using the smallest supported packet size of 64 bytes. Flowmon Probe is configured without any optional L2/L3/L4/L7 protocol analysis, tunnel decapsulation or additionally installed packages. In virtual environments, the performance depends on allocated resources, overall system load, and environment of deployment. There are several other factors that may affect your specific performance, such as traffic type, average packet size, distribution of packet arrival times, number and type of L2/L3/L4/L7 protocols being analyzed or additionally installed packages. While we do our best to represent the data as fairly and accurately as possible, your environment may experience different limits.

² A number of flow entries in flow cache per monitoring port.

³ Some configuration options, such as supported disk size, may be limited by the customer's virtual environment regardless of which Flowmon Probe model has been selected. Any such limitations should be consulted with the vendor/distributor of the virtual environment.

⁴ The Flowmon Probe VA must be running on a host system that supports the following instruction sets: MMX, SSE, SSE2, SSE3, SSSE3, CX16, SAHF, FXSR and AVX. For Intel and AMD CPUs, it corresponds to CPUs introduced in 2011 and later.

About Progress

Dedicated to propelling business forward in a technology-driven world, [Progress](#) (NASDAQ: PRGS) helps businesses drive faster cycles of innovation, fuel momentum and accelerate their path to success. As the trusted provider of the best products to develop, deploy and manage high-impact applications, Progress enables customers to build the applications and experiences they need, deploy where and how they want and manage it all safely and securely. Hundreds of thousands of enterprises, including 1,700 software companies and 3.5 million developers, depend on Progress to achieve their goals—with confidence. Learn more at www.progress.com

2025 Progress Software Corporation and/or its subsidiaries or affiliates. All rights reserved. Rev 2025/11 RITM0168479

[f](#) /progresssw
[t](#) /progresssw
[v](#) /progresssw
[in](#) /progress-software
[o](#) /progress_sw_

